

# DURA-PUMP™ ASSEMBLY GUIDES

DP 6000 Series | DEF 2000 Series

***Congratulations on your recent Dura Products purchase.***

This guide will take you through the steps to easily assemble your device.



## **EASY CADDY**

*Instructions on page 2*



## **QUICK CADDY**

*Instructions on page 3*

## **TOP UNLOAD**

*Instructions on page 4*



**DURA PRODUCTS**  
Technology with Lasting Value

# DURA-PUMP™ EASY CADDY

DP 6000 Series | DEF 2000 Series

## ATTENTION

Apply an even coat of Thread Sealant on male threads. Hand tighten joints and torque another 1/2 to 3/4 turn until threads are sealed.

### Contents:

- A** (1) Dura-Pump™
- B** (2) 1" Hose Barb
- C** (1) 1" x 5ft, 1.5m Suction Hose
- D** (4) 1" Hose Clamps
- E** (2) 90° Hose Barb
- F** (1) 2" Female Camlock
- G** (1) 2" x 1" Bushing
- H** (1) 1" x 12ft, 3.6m Discharge Hose
- I** (1) Ball Valve Nozzle
- J** (1) Caddy
- K** (3) Snap-pins (*not pictured*)
- L** (1) 1" Nipple
- M** (1) Dura-Meter™ (*optional*)

### Tools Required:

1. 5/16 wrench or flat head screwdriver
2. Pipe thread sealant

### For SIDE MOUNT Use:

Trim suction hose down to needed length to fit.

*Suggested length of 22" for 275 cage tank.*

*See page 1 for finished photo.*

## Suction Hose

(see illustration 1)

**Step 1:** Slide **C** onto **B** and tighten **D**

**Step 2:** Slide **E** into opposite end of **C** and tighten **D**

**Step 3:** Thread **F** onto **G**, then thread **G** onto **E**

**Step 4:** Thread **B** into suction side of **A**

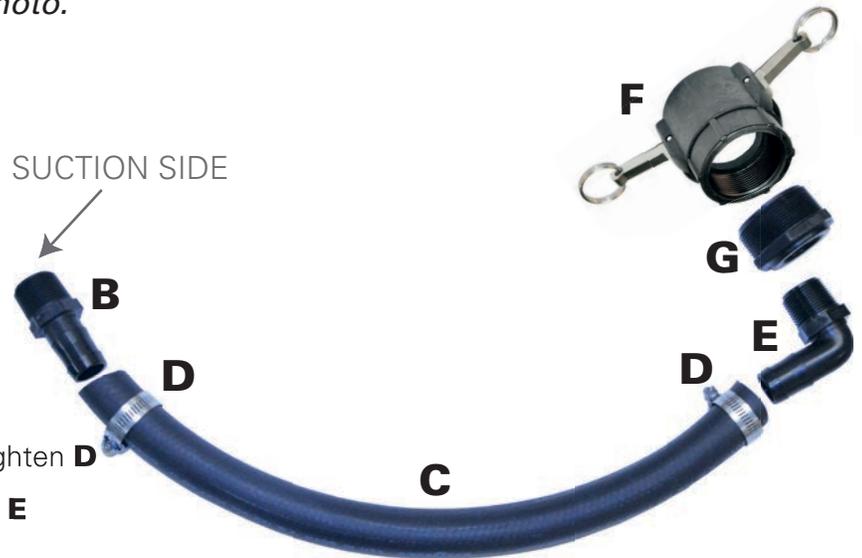


illustration 1

## Discharge Hose

(see illustration 2)

**Step 5:** Thread **E** into the discharge side of **A**

**Step 6:** Slide end of **H** onto **E** and tighten **D**

**Step 7:** Slide **B** into opposite end of **H** and tighten **D**

*If you have purchased a Dura-Meter™, skip Step 8 and proceed to Step 9.*

**Step 8:** Thread **I** onto end of **B**

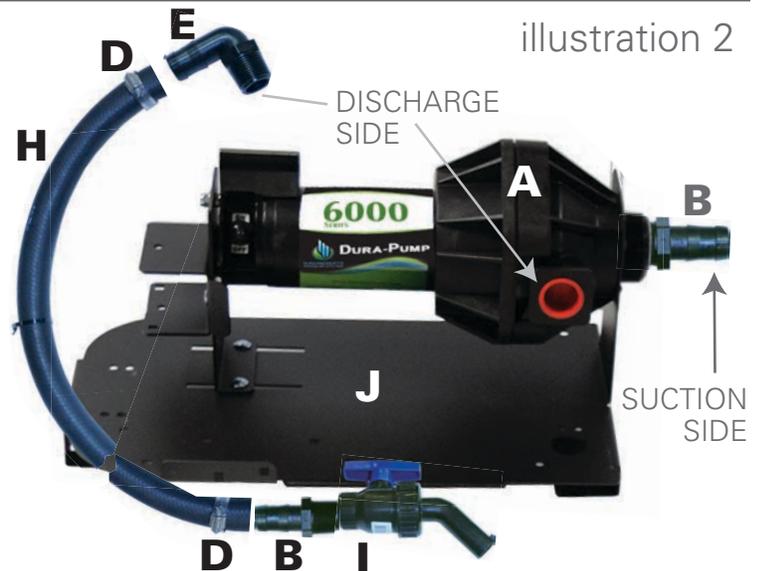


illustration 2

## (Optional) Dura-Meter™

(see illustration 3)

**Step 9:** Thread **L** into right "OUT" port of **M**

**Step 10:** Thread left port of **M** onto **B**

**Step 11:** Thread **I** onto **L**



illustration 3

# DURA-PUMP™ QUICK CADDY

DP 6000 Series | DEF 2000 Series

## ATTENTION

Apply an even coat of Thread Sealant on male threads. Hand tighten joints and torque another 1/2 to 3/4 turn until threads are sealed.

### Contents:

<b>A</b> (1) Dura-Pump™	<b>H</b> (1) 1" x 12ft, 3.6m Discharge Hose
<b>B</b> (2) 90° Hose Barb	<b>I</b> (1) Ball Valve Nozzle
<b>C</b> (1) 1" x 5ft, 1.5m Suction Hose	<b>J</b> (3) Snap-pins ( <i>not pictured</i> )
<b>D</b> (4) 1" Hose Clamps	<b>K</b> (1) Caddy
<b>E</b> (1) 2" Female Camlock	<b>L</b> (1) Dura-Meter™ ( <i>optional</i> )
<b>F</b> (1) 2" x 1" Bushing	<b>M</b> (1) 1" Nipple
<b>G</b> (2) 1" Hose Barb	

### Tools Required:

- 5/16 wrench or flat head screwdriver
- Pipe thread sealant

See page 1 for finished photo.

## Suction & Discharge Hoses

(see illustration 1)

- Step 1: Suction Hose:** Thread **B** into suction side of **A**
  - Step 2:** Slide **C** onto **B** and tighten **D**
  - Step 3:** Slide second **B** into opposite end of **C** tighten **D**
  - Step 4:** Thread **F** into **E**
  - Step 5:** Thread **F** onto **B**
  - Step 6: Discharge Hose:** Screw **G** into discharge side of **A**
  - Step 7:** Slide end of **H** onto **G** and tighten **D**
  - Step 8:** Slide second **G** into opposite end of **H** and tighten **D**
- If you have purchased a Dura-Meter™, skip Step 9 and proceed to Step 10.
- Step 9:** Thread **I** onto end of **G**

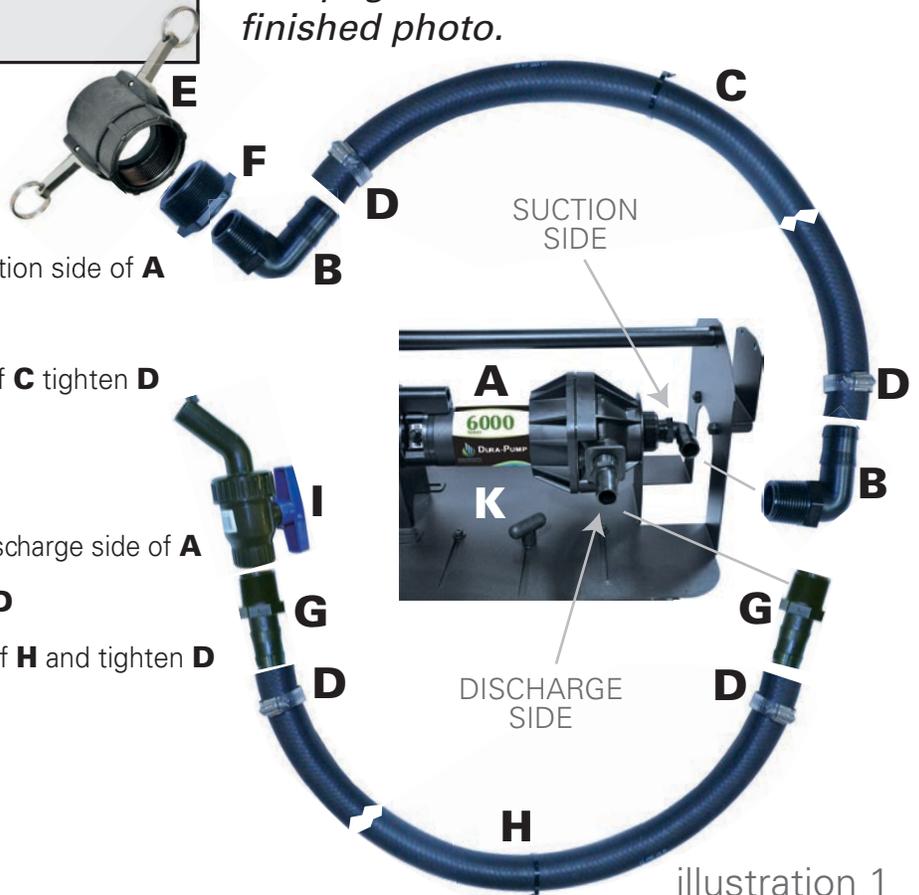


illustration 1

illustration 2

## (Optional) Dura-Meter™

Meter can be plumbed in-line or mounted at the pump.

For in-line, follow Steps 10, 11 and 12 (see illustration 2)

- Step 10:** Thread **M** into right "OUT" port of **L**
- Step 11:** Thread left port of **L** onto **G**
- Step 12:** Thread **I** onto **M**



For pump mounting, follow Steps 13, 14 and 15 (no illustration)

- Step 13:** Remove the 1" plug from back port of **L** and thread **M** into back port
- Step 14:** Thread **G** into right "OUT" port of **L**
- Step 15:** Thread 1" plug into the left side of **L**

# DURA-PUMP™ TOP UNLOAD

DP 6000 Series | DEF 2000 Series

## ATTENTION

Apply an even coat of Thread Sealant on male threads. Hand tighten joints and torque another 1/2 to 3/4 turn until threads are sealed.

### Contents:

- A** (1) Dura-Pump™
- B** (1) 1" Dip Tube
- C** (2) 1" Hose Barbs
- D** (1) 1" x 12ft, 3.6m Discharge Hose
- E** (2) 1" Hose Clamps
- F** (1) Ball Valve Nozzle
- G** (1) Dura-Meter™ (optional)
- H** (1) 1" Nipple

### Tools Required:

1. 5/16 wrench or flat head screwdriver
2. Pipe thread sealant

See page 1 for finished photo.

## Dip Tube & Discharge Hose

(see illustration 1)

**Step 1:** Thread **B** into the suction side of **A**

**Step 2:** Screw **C** into the discharge side of **A**

**Step 3:** Slide end of **D** onto **C** and tighten **E**

**Step 4:** Slide the second **C** into opposite end of **D** and tighten **E**

If you have purchased a Dura-Meter™, skip Step 5 and proceed to Step 6.

**Step 5:** Thread **F** onto end of **C**

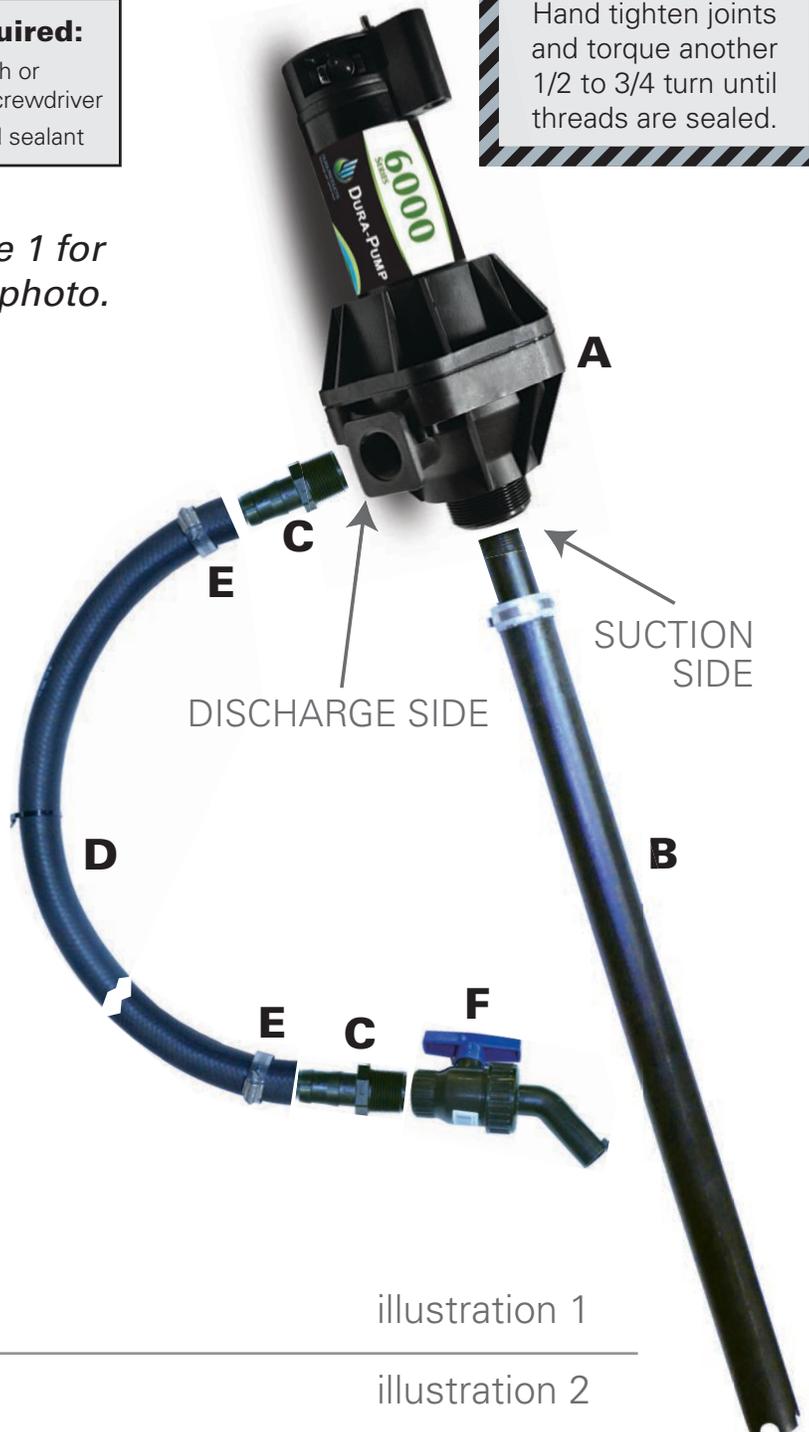


illustration 1

illustration 2

## (Optional) Dura-Meter™

(see illustration 2)

**Step 6:** Thread **H** into right "OUT" port of **G**

**Step 7:** Thread left port of **G** onto **C**

**Step 8:** Thread **F** onto **H**

